

Material Specification WorldKeg

usage category: one way

Steam Sterilisation

pressure CO₂ / N₂ flushing

Pre pressurisation

110°C/ 15 sec dwell time

0,4 bar

1,5 bar



Material per component

Material per component	Standard	Contact with product
Handle/ base ring	ABS	no
adhesive Handle/ base ring	Henkel Teroson MS 939	no
WorldKeg casing	V2A -AISI 304 -0,3mm	yes
WorldKeg top/ bottom lid	V2A -AISI 304 -0,8mm	yes
dispense head	ABS	yes
CO ₂ safty ball dispense head	PA 6.6	yes
tapping valve (fitting) casing	POM	yes
CO ₂ sealing	Silicone	yes
PIN/ product sealing	EPDM	yes
O-ring sealing	NBR	yes
extrator tube	V2A -AISI 304	yes

Volume

Filling volume

30,0 litre

Total volume

30,5 litre

Pressure information

max. tapping pressure

7,0 bar

max. storage pressure

8,0 bar

burst pressure

10 +/- 1 bar

CO₂ - food safe quality - Westfalen Gas

Protadur E 290

Dimension/ weight

weight empty WorldKeg


2,3 kg

weight full WorldKeg

32,3 kg

Height

600 mm

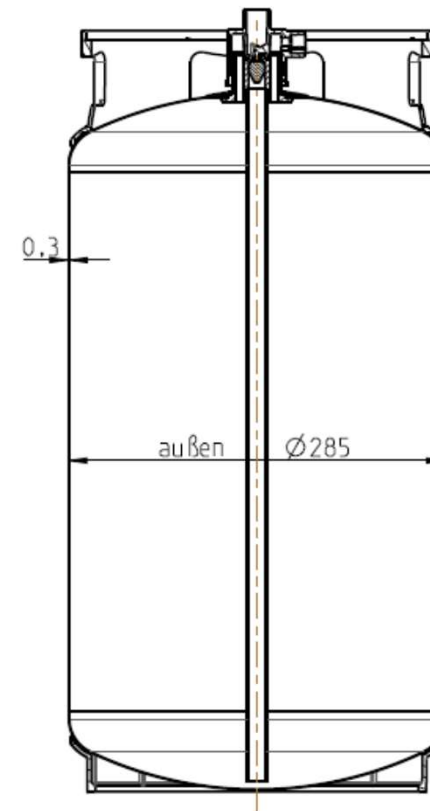

Diameter

285 mm

Last amended 28.02.2018